


Q-Wash™ 560Z-LED

SPECIFICATIONS & FEATURES

CHAUVET®

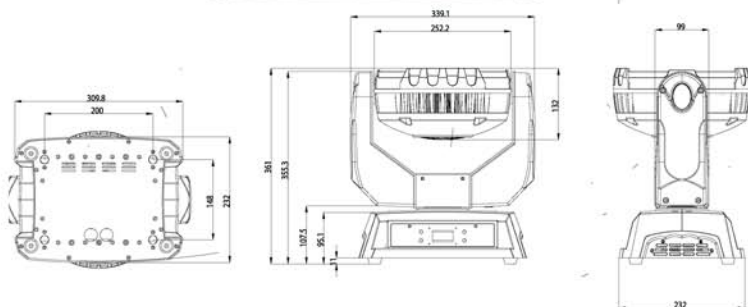

DETAILED SPECIFICATIONS:

FEATURES

- DMX channels: (12 or 15)
- 6°~ 32°zoom
- Colors: RGBWA LEDs
- RGBWA color mixing
- IP rating: IP20
- Lightweight and easy to install
- 3-pin and 5-pin DMX connections
- User-selectable pan/tilt ranges
- Automatic pan/tilt correction
- User-selectable basic or advanced operating modes

SPECIFICATIONS

- Pan & tilt: 540° / 270°
- DMX connectors: 3-pin & 5-pin
- Light source: 91 (22 red, 23 green, 22 blue, 12 white, 12 amber) 3W (.942mA) LEDs 50,000hrs LEDs
- Strobe rate: 0 - 20Hz
- Beam angle: 6°~ 32°
- Field angle: 9°~ 37°
- Illuminance: 13,100 LUX @ 5m (tight zoom), 917 LUX @ 5m (wide zoom)
- Cable length: 5ft (1.52m)
- Input voltage: auto-ranging 100-240VAC 50/60Hz
- Power and current: 309W, 2.7A @ 120V 60Hz
- Power and current: 292W, 1.5A @ 208V 60Hz
- Power and current: 289W, 1.4A @ 230V 50Hz
- Weight: 21.2lbs (9.62kg)
- Size: 9.1 x 13.3 x 14.2in (232 x 339 x 361mm)
- Approvals: CE, ETL

AT A GLANCE:

RGBAW Color Mixing



Key Features:

- 91, 3 W CREE RGBAW LEDs deliver huge output with the ability to show the most vibrant hues and subtle pastels.
- 6-32 degree zoom allows for programming versatility in keeping light where its needed.
- Fast pan and tilt creates great effects and gets itself into position fast.
- 3 and 5-pin DMX connections allow the light to fit into any existing rig.
- Flicker free performance, makes the fixture safe for use on camera

About this light:

The Q-Wash 560Z-LED is an LED powered moving yoke wash with a variable zoom. The 6-32 degree zoom serves to highlight specific areas or flood the stage. This lightweight fixture boasts fast pan/tilt speed and the variable beam angle allows it to perform a multitude of tasks. Thanks to 91, 3 W CREE RGBAW LEDs this light outshines everything in its class and boasts better output with improved color rendering over the Q-Wash 360Z-LED.

www.chauvetlighting.com
info@chauvetlighting.com

CHAUVET®