

Technical Support

Should you have any questions regarding your TC25 microphone please contact us:

e-mail: Support@EarthworksAudio.com
phone: 1-603-654-6427 (9a.m. – 5p.m. ET)

For warranty and product return/exchange information please refer to the back of the enclosed Calibration Chart.



Earthworks, Inc.
37 Wilton Rd.
Milford, NH 03055 USA
Phone: 1-603-654-6427
Fax: 1-603-654-6107
<http://www.EarthworksAudio.com>



TC25 Omnidirectional Microphone Owner's Manual



Made in U.S.A.

Description

Earthworks TC25 is an omnidirectional (pressure) prepolarized condenser microphone directly coupled to a dedicated wideband, low output impedance preamplifier. The TC25 requires a standard 48V phantom power supply. It features a linear free-field frequency response from 9Hz to 25kHz (Fig. 2), fast impulse response (Fig. 3), very low handling noise, uniform polar pattern, and very high SPL handling capabilities. It exhibits no proximity effect.

Applications

Earthworks TC25 is easy to operate. Connect the microphone to a microphone preamplifier supplying 48V phantom power using a standard XLR microphone cable. *Please allow up to one minute for the microphone to settle.* Plugging in the microphone “hot” (phantom power already present at the input) will not damage the microphone, and is actually preferred for faster settling. It is normal for any phantom powered mic to “pop” when plugged in or powered up. Make sure to mute the signal to speakers or headphones when phantom power is first applied.

The TC25 is designed specifically for drums and percussion and is the model that comes in the Earthworks Drumkit™ System. The TC25 has a brilliance that is ideal for drum overheads, percussion, Leslie, guitar and bass. It is a versatile microphone great for general studio use and is an exceptional value. It has no handling noise, no proximity effect, and is very forgiving in terms of placement.

A mounting clip is included with the microphone. This microphone has no removable parts.

Care of Microphones

Earthworks TC25 microphone is a precision instrument designed and built to provide years of top performance. Following these simple rules will help to protect your investment in the TC25:

- Avoid touching the front protective screen.
- Never attempt to disassemble the microphone – it cannot be opened.
- Avoid extreme heat and condensing humidity. Allow the microphone to warm up in the case when bringing it in from the cold weather. Rough handling may damage the microphone even if no visible marks are left.
- When not in use keep the TC25 in its case

Specifications

Frequency response:	9Hz to 25kHz +1/-3dB
Polar Pattern:	Omnidirectional (Fig. 4)
Sensitivity:	8mV/Pa (Typical)
Power Requirements:	48V Phantom, 10mA
Peak Acoustic Input:	145dB SPL
Output:	XLR (Fig. 1)
Output Impedance:	100Ω, balanced (50Ω ea. pin 2 & 3)
Minimum Load:	600Ω btw. pins 2 & 3
Noise:	27dBA equivalent
Dimensions L x D	165 x 22 mm (6.5 x .860 in.)
Weight:	160g (.35lb)

CE Compliant

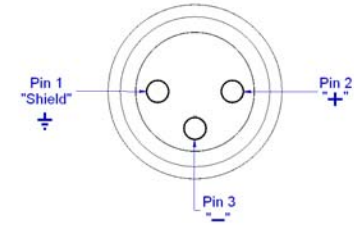


Fig. 1. XLR Output Connector Assignment of TC25

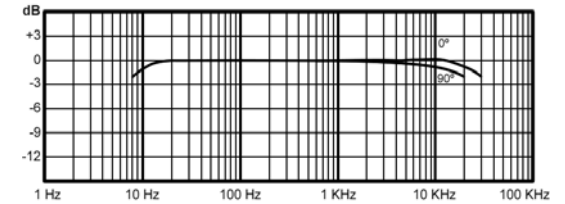


Fig. 2. Frequency Response (Typical) of TC25

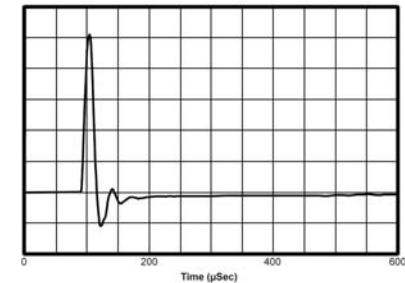


Fig. 3. Impulse Response (Typical) of TC25

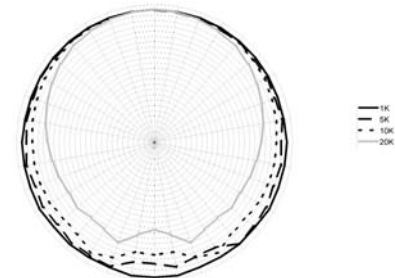


Fig. 4. Polar Response (Typical) of TC25, 1dB/div.

Specifications are subject to change without notice.